



# INDICATOR LIGHTS

(BUILT-IN LED / NEON )

SERIES : IL.10P

ISSUE - PIS/IL.10P

DATE : 01.10.12

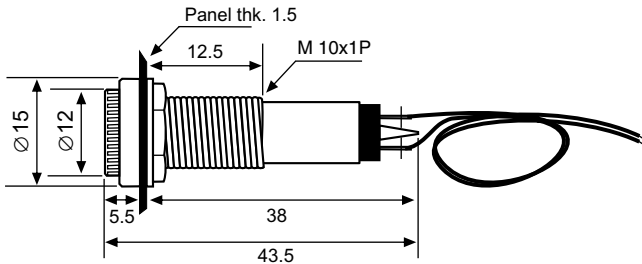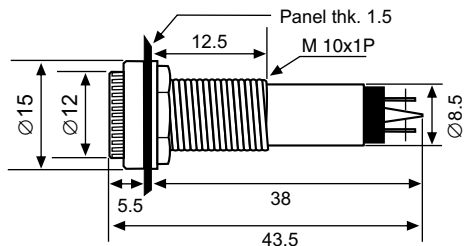


## SPECIFICATIONS

### MECHANICAL

MAIN HOUSING : POLYCARBONATE  
 LENS MATERIAL : ACRYLIC  
 LENS COLOUR : RED, GRN, AMB., CLR.,BLU.  
 HEX. NUT : POLYCARBONATE  
 TERMINAL BASE : POLYCARBONATE  
 TERMINALS : BRASS TINNED  
 CONNECTION : SOLDER / FLYING LEADS  
 FLY. LEADS : 15 cms PVC 14/0.0048  
 WEIGHT : 3 GRAMS APPROX

## PANEL CUT OUT & MIN. SPACING

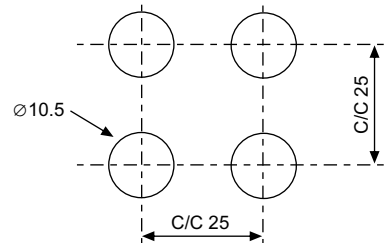

ALL DIMENSIONS ARE IN mm

## ELECTRICAL

LAMP	RATED VOLTAGE	MIN. OPERATING VOLTAGE	CURRENT DRAWN
LED Super Bright	12VDC	4.57V	10.16 mA
	24VDC	8.15V	10.25 mA
	48VDC	17.78V	09.87 mA
	220VAC	24.00V	02.00 mA
Neon(4mm)	110VAC	72.60V	01.73 mA
	220VAC	84.30V	02.35 mA

Voltage Breakdown : > 1000 V AC (Terminal to Housing)

Insulation Resistance : > 1000 MΩ @ 500 V DC

## ORDERING CODE

SERIES	LENS COLOUR	RATED VOLTAGE		TERMINAL
		LED	NEON	
IL.10 P	R - RED	1 - 12V DC	6 - 110V AC	1-SCREW 2-FLY. LEADS
	G - GREEN	2 - 24V DC	7 - 220V AC	
	A - AMBER	3 - 48V DC		
	C - CLEAR	4 - 110V AC		
		5 - 220V AC		
	B - BLUE			

IL.10P - R - 2 - 1

Manufactured by:

**piri electrols pvt. ltd.**

A-28, Royal Industrial Estate, Naigaum Cross Road, Wadala, Mumbai 400031. INDIA.

☎ (022) 2412 8342/43 • Fax: (022) 2414 9077 • E-Mail : piri electrols@gmail.com • Website : www.piri electrols.com

